


Low Maintenance (Dry Charged)

Longer Lifespan & Higher Power

The classical power solution with strong starting power source, the Low Maintenance "Dry Charged" Battery utilizes full cranking power as the right choice for a wide range of vehicles.

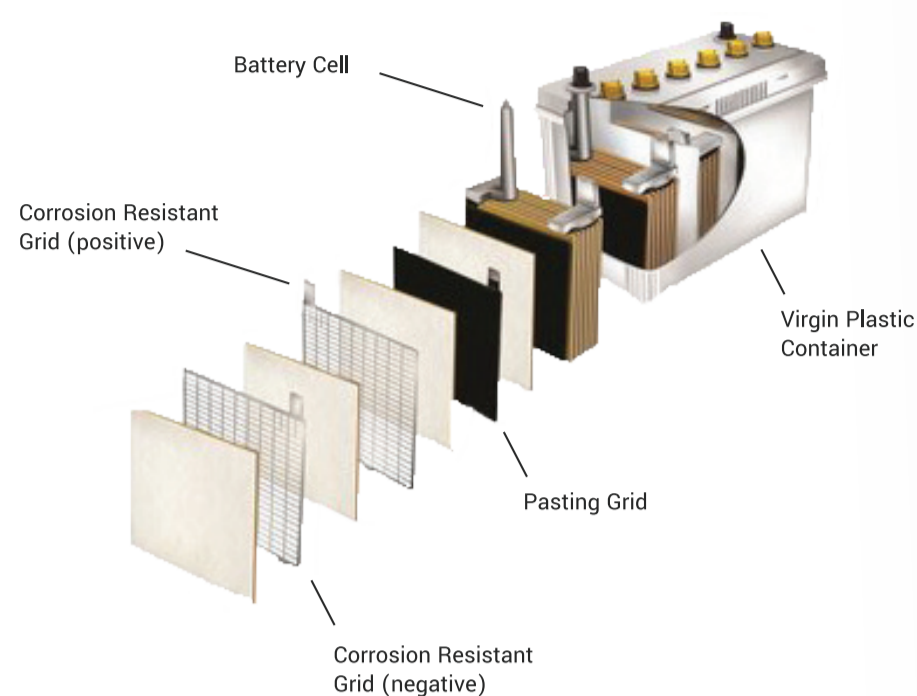

Low Maintenance (JIS)

For Japanese Vehicles

Model	Capacity at 20 hr (Ah)	Plate/Cell (pcs)	Battery Dimension (mm.)				Approx Weight (Kg)	Approx Acid/Battery (L)	Terminal Direction	Cell Layout
			L	W	H	TH				
12N24-3	26	11	185	125	160	174	5.2	1.8	C	0
12N24-4	26	11	185	125	160	174	5.2	1.8	C	1
NS40L	32	9	195	127	200	222	5.4	2.8	B	0
NS40	32	9	195	127	200	222	5.4	2.8	B	1
NS40ZL	35	11	195	127	200	222	6.1	2.5	B	0
NS40Z	35	11	195	127	200	222	6.1	2.5	B	1
N40L	40	11	236	127	200	222	6.6	3.3	B	0
N40	40	11	236	127	200	222	6.6	3.3	B	1
NS60L	45	13	236	127	200	222	8.2	3.0	B	0
NS60	45	13	236	127	200	222	7.7	3.0	B	1
55D23L	60	11	230	171	200	223	10.5	3.7	A	0
55D23R	60	11	230	171	200	223	10.5	3.7	A	1
75D23L	65	13	230	171	200	223	11.8	3.5	A	0
75D23R	65	13	230	171	200	223	11.8	3.5	A	1
N50L	50	9	256	170	201	224	9.0	5.4	A	0
N50	50	9	256	170	201	224	9.0	5.4	A	1
N60L	60	11	256	170	201	224	10.6	5.2	A	0
N60	60	11	256	170	201	224	10.6	5.2	A	1
NS70L	65	13	256	170	201	224	11.1	5.0	A	0
NS70	65	13	256	170	201	224	11.1	5.0	A	1
N70L	70	13	303	170	201	224	12.2	5.4	A	0
N70	70	13	303	170	201	224	12.2	5.4	A	1
NS100	75	15	303	170	201	224	12.9	5.0	A	1
NS100Z	90	16	303	170	201	224	14.34	6.5	A	1
TX1000L	100	19	303	170	201	224	17.0	5.6	A	0
TX1000	100	19	303	170	201	224	17.0	5.6	A	1
N100A	95	15	406	173	209	232	14.0	7.8	A	1
N100L	100	17	406	173	209	232	16.0	5.0	A	0
N100	100	17	406	173	209	232	16.0	5.0	A	1
N120A	110	19	502	180	210	255	19.2	9.5	E	1
N120	120	21	502	180	210	255	21.0	9.5	E	3
N150A	140	23	505	220	210	255	23.1	12.0	E	3
N150L	150	25	505	220	210	255	24.9	11.5	E	2
N150	150	25	505	220	210	255	24.9	11.5	E	3
N200A	190	31	517	275	216	261	31.6	15.5	E	3
N200	200	33	517	275	216	261	32.9	15.0	E	3

Low Maintenance (DIN)

For European Vehicles

Model	Capacity at 20 hr (Ah)	Plate/Cell (pcs)	Battery Dimension (mm.)				Approx Weight (Kg)	Approx Acid/Battery (L)	Terminal Direction	Cell Layout
			L	W	H	TH				
54434	44	9	210	175	190	190	9.2	3.0	A	0
54533	45	11	241	175	175	175	9.2	3.3	A	0
55530	55	11	241	175	190	190	9.2	3.5	A	0
55548	55	11	241	175	190	190	9.2	3.5	A	1
DIN60	60	11	241	175	190	190	9.2	3.6	A	0
DIN60L	60	11	241	175	190	190	9.2	3.6	A	1
56311	63	13	276	175	175	175	10.8	4.4	A	0
DIN65	65	13	241	175	190	190	10.8	3.3	A	0
56618	66	13	276	175	190	190	11.0	4.8	A	0
57217	72	15	276	175	190	190	12.2	4.0	A	0
DIN75	75	15	276	175	190	190	12.3	4.0	A	0
58815	88	17	353	175	190	190	14.9	5.5	A	0
DIN100	100	19	353	175	190	190	14.9	5.2	A	0
67018	170	21	512	222	193	220	32.7	11.5	E	2